


### Content


2 x Screws



1 x Damper



2 x Screw plug




1 x Mount piece




### Adjustment

Adjust the handle by rotating the damper's rod. The damper should be adjusted so that the gap between the front and the cabinet's front edge is approximately 2mm. Experiment to find a distance that allows a comfortable opening function.

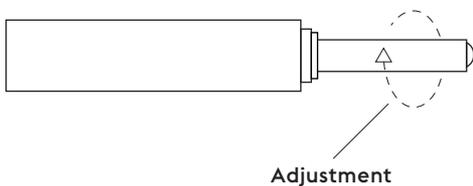


### Placement

Mount the Push-open at the height where you will push the front to open.

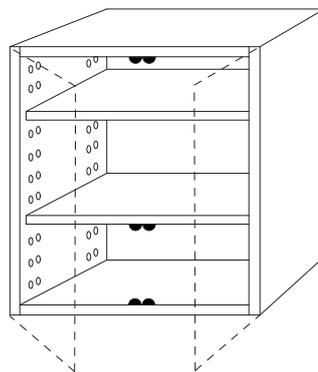

On a cabinet with two door fronts, Push-open is preferably mounted in the frame. If not possible, mounting it on a shelf will also work.

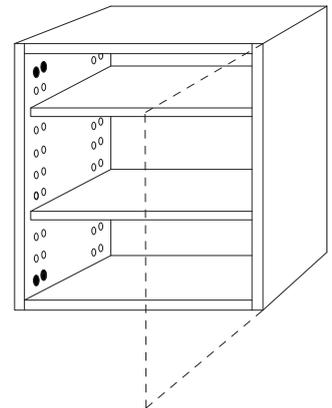

On a cabinet with one door front, Push-open should be mounted in the hinge holes, if possible at the height where you will push the front to open. E.g. at the bottom of an upper cabinet, and at the top of a bottom cabinet. And on a tall cabinet, about 120cm from the floor.