
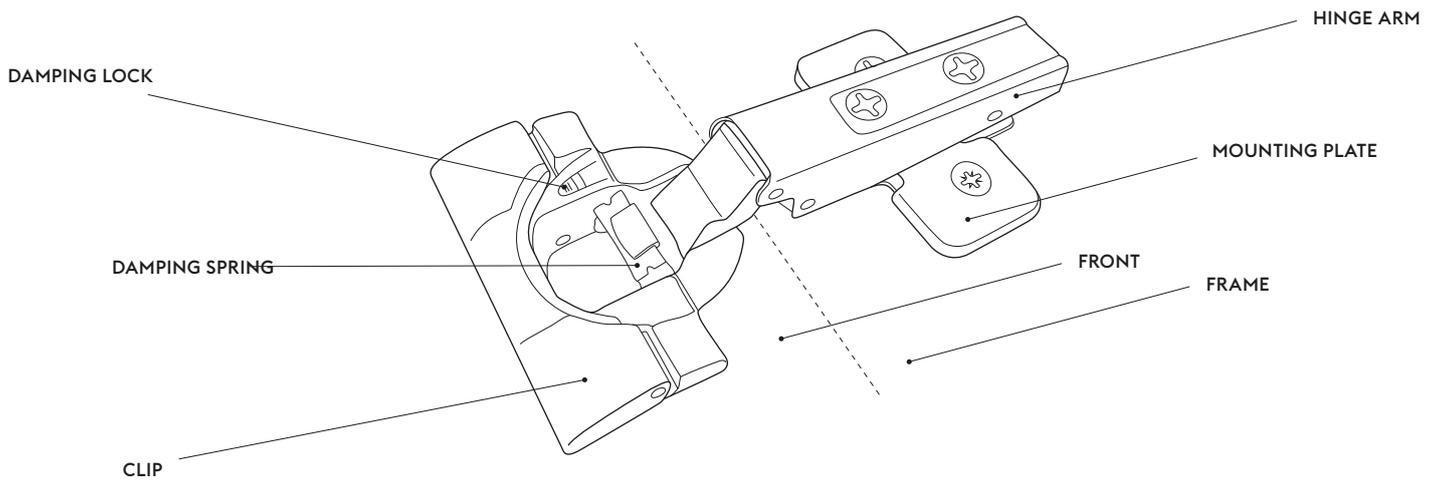


Content (For one hinge)

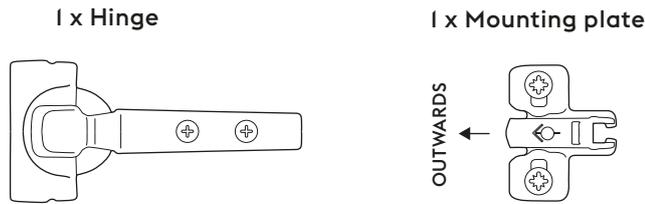

1. Mount the mounting plate in the frame.

Mount the plate using the supplied screws in the predrilled holes in the cabinet.

Before you attach the mounting plate: make sure where to mount it by holding the front in place to see which holes align with the holes on the front.

NOTE! Make sure that the arrow on the mounting plate is pointing outwards.


2. Mount the hinge in the front.

The damping hinges should sit at the top and the bottom.


Place the hinge in the hole in the front and then fold the clip down. Attach the hinge to the mounting plate by hooking the front part of the hinge arm into the plate. Then lightly press the rear of the hinge arm until it clicks.

Adjusting the hinges.


You can easily adjust the exact location of the front in three dimensions:



The outer screw on the hinge arm adjusts the front sideways. You can also level the front by simply adjusting this screw on one of the hinges.



The inner screw of the hinge arm adjusts the depth of the front, i.e. how far out from the frame the front should sit.



Adjust the height of the front by loosening these screws and pressing the mounting plate up or down.